



FROM HIGH LOAD-BEARING TO EFFECTIVE DRAINAGE, IT'S INDIA'S TRU-CHOICE.

Lightweight
Foamcore Piping Systems.



Pipes as per
IS:16098



PRODUCT RANGE

Pipes : 110mm - 315mm



EXTENSIVELY USED IN



WASTE DRAINAGE LINE

APPLICATIONS


- Underground drainage.

MAJOR ADVANTAGES

- Lighter than solid wall PVC but stronger.
- Easy underground installation.
- Compatibility with other drainage and sewerage products.
- Cost-effective.
- Long life due to improved strength.

JOINTING METHOD

Solvent Joint & Elastomeric Sealing Ring.

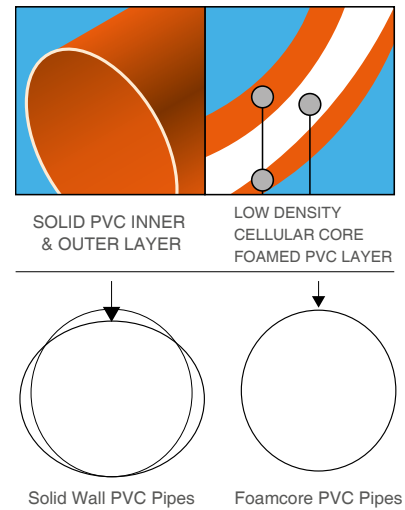

PIPE DIMENSIONS

FOR FOAMCORE PIPING SYSTEMS

Pipe Size (mm)	Nominal Outside Diameter	Mean Outside Diameter (mm)		Wall Thickness (mm)					
				SN2 (SDR 51)		SN4 (SDR 41)		SN8 (SDR 34)	
				Diameter (mm)	Minimum	Maximum	Minimum	Maximum	Minimum
110	110.00	110.00	110.40	-	-	2.80	3.30	3.20	3.70
125	125.00	125.00	125.40	-	-	3.20	3.70	3.70	4.40
160	160.00	160.00	160.50	3.20	3.70	4.00	4.60	4.70	5.40
200	200.00	200.00	200.60	3.90	4.50	4.90	5.60	5.90	6.70
250	250.00	250.00	250.80	4.90	5.60	6.20	7.00	7.30	8.30
315	315.00	315.00	316.00	6.20	7.00	7.70	8.70	9.20	10.40